

NACHI

GAUGE BLOCK



GAUGE 용 MODULAR BLOCK

50~100 ℓ/min
25MPa


특징

- ①이 BLOCK은 P, T PORT 또는 A, B PORT에 압력계 등을 접속하기 위한 MODULAR BLOCK입니다.
- ②PORT 쪽에 설치하는 것은 아주 간단합니다.

사양

형식	호칭경 (SIZE)	최고사용압력 MPa(kg/cm ²)	최대유량 ℓ/min	질량 kg	GASKET 면 치수
OK-G01-P-20 OK-G01-T-20	1/8	25{255}	50	0.6	ISO 4401-03-02-0-94
OK-G01-W-20				0.6	
OK-G01-P-H-20 OK-G01-T-H-20				1.0	
OK-G01-W-H-20				1.0	
OK-G03-J50	3/8	25{255}	100	2.3	ISO 4401-05-04-0-94

형식설명

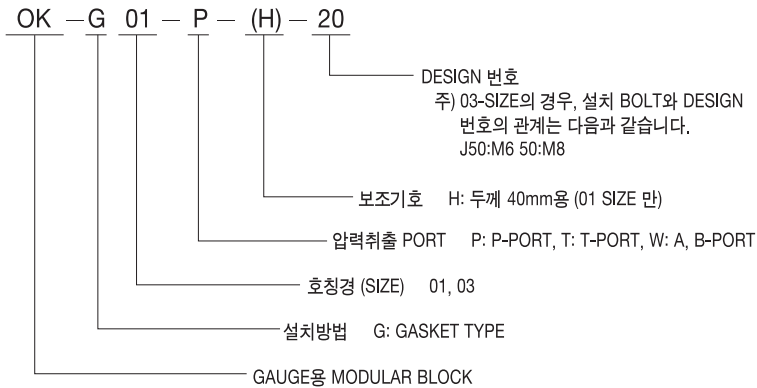



●취급

- ①설치할 때는 OK-G01-P-(H)-20, OK-G01-T-(H)-20, OK-G01-W-(H)-20 모두, 명판이 P-PORT의 측면에서 바로 읽을 수 있도록 설치하여 주십시오.
- ②SUB-PLATE 및 설치 BOLT는 포함되어있지 않으므로 D-90~D-95 페이지에서 지정하여 주십시오.



D MODULAR VALVE

설치치수도



OK-G01-P-20

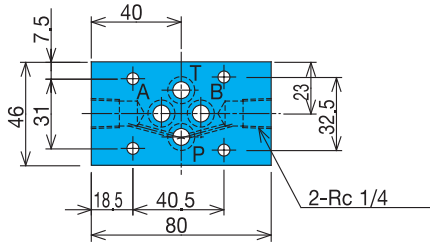



OK-G01-T-20

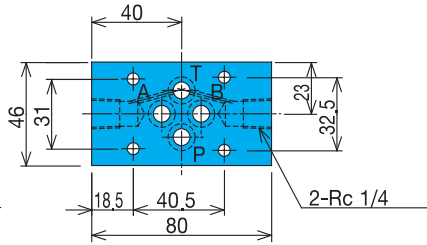



OK-G01-W-20

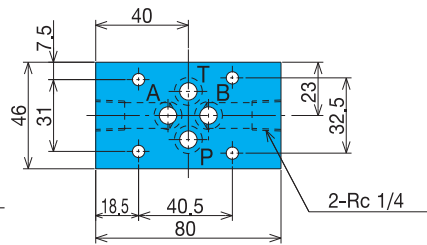



OK-G01-P-H-20

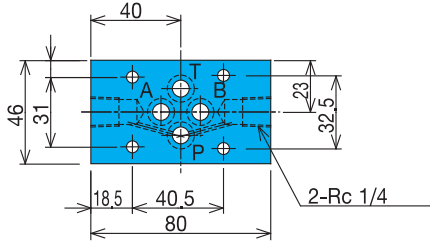

OK-G01-T-H-20

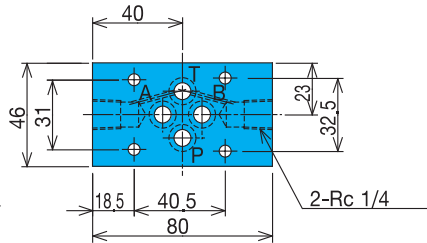

OK-G01-W-H-20

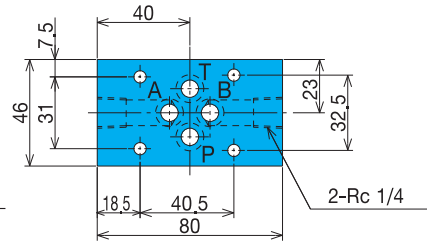

OK-G03-J50

